

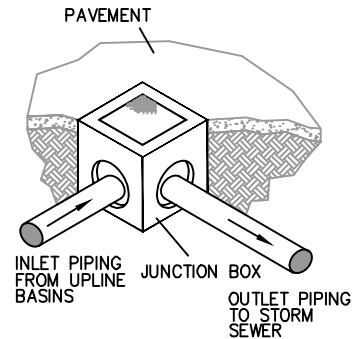


KEYED NOTES		
MARK	QTY	DESCRIPTION
1	1	STEEL COVER, SKID-RESISTANT & PEDESTRIAN DUTY STD. [TRAFFIC-DUTY OPTIONAL]
2	1	CAST-IN STEEL FRAME
3	1	OPTIONAL EXTENSION 6" OR 12"
4	1	PRECAST CONCRETE BASIN SECTION
5	4	THIN WALL KNOCKOUT ON ALL 4 SIDES, SEE KO DIMENSION FOR MAXIMUM PIPE O.D.
6	1	NAMEPLATE INDICATING: MFG: NWPX PARK 888-611-PARK WWW.PARKUSA.COM MODEL: JB DATE MANUFACTURED
7	-	ALL JOINTS SEALED WATER-TIGHT WITH RAM-NEK

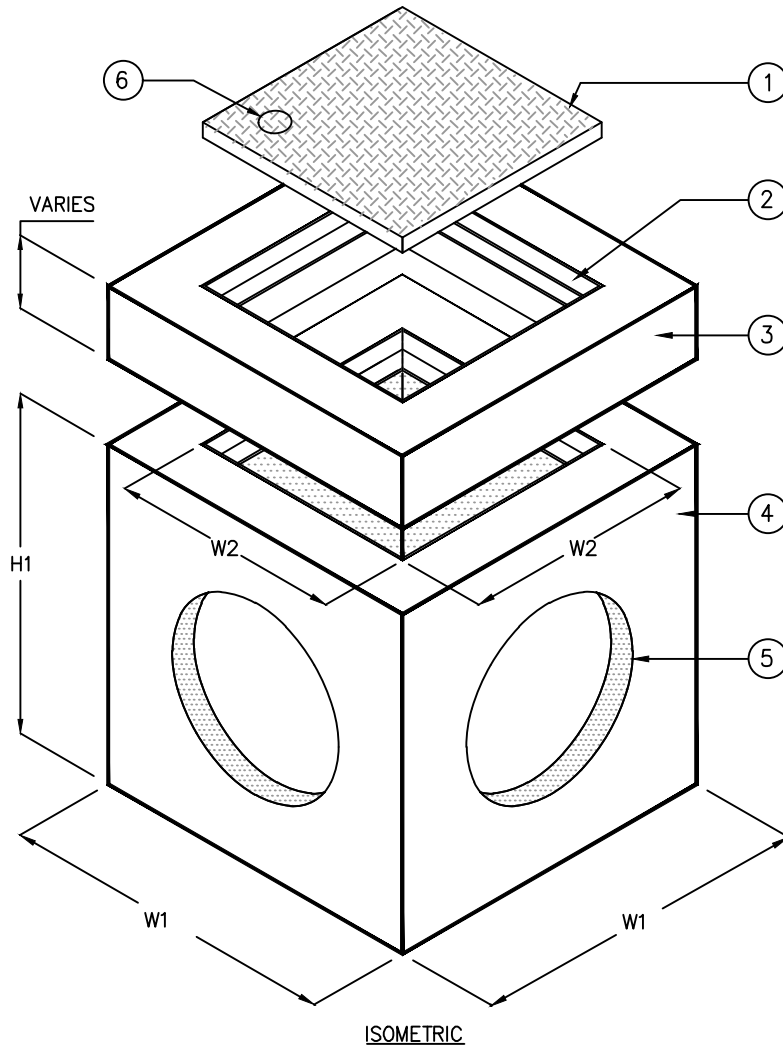

JUNCTION BOX SCHEDULE									
MODEL NO.	W1	W2	H1	H2	T1	T2	KO	COVER SIZE	WEIGHT LBS
JB-12	15"	10"	21"	18"	3"	2 1/2"	10"	12"x12"x1"	180
JB-14	20"	12"	28"	24"	4"	4"	12"	14"x14"x1-1/2"	600
JB-18	24"	16"	34"	30"	4"	4"	15"	18"x18"x1-1/2"	1,000
JB-20	26"	18"	34"	30"	4"	4"	17"	20"x20"x1-1/2"	1,335
JB-24	32"	22"	41"	36"	5"	5"	22"	24"x24"x2"	2,245
JB-27	37"	25"	42"	36"	6"	6"	24"	27"x27"x2"	2,875
JB-30	42"	30"	42"	36"	6"	6"	30"	32"x32"x2"	3,675
JB-36	48"	36"	42"	36"	6"	6"	32"	38"x38"x2"	4,585

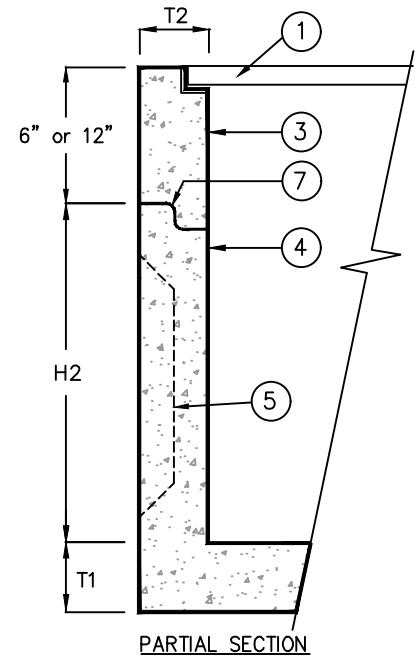

## SPECIFICATIONS

CONCRETE:	PRECAST CONCRETE WITH OF DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH.
REINFORCEMENT:	GRADE 60 REINFORCED. STEEL REBAR CONFORMING TO ASTM A615 ON REQUIRED CENTERS OR EQUAL.
COVER & FRAME:	ALL STEEL FABRICATION SHALL BE IN ACCORDANCE TO AWA D1.1. STEEL SHALL BE ASTM A36 CARBON STEEL, AND HOT-DIPPED GALVANIZED AFTER FABRICATION IN ACCORDANCE TO ASTM A123

					JUNCTION BOX	
					MODEL JB - 12" THRU 36"	
PM	PC	DRN	ENG	DWG. NO.	REV.	
DATE	10/25	KV	CE			
JB-1-WA					A	