
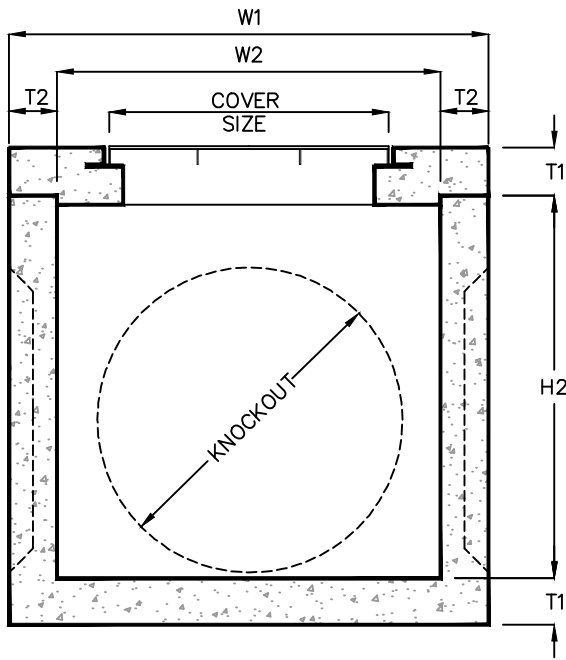


KEYED NOTES		
MARK	QTY	DESCRIPTION
1	1	STEEL COVER, SKID-RESISTANT & PEDESTRIAN DUTY STD. [TRAFFIC-DUTY OPTIONAL] (JUNCTION BOX)
2	1	PRECAST CONCRETE TOP w/ CAST IN FRAME
3	1	PRECAST CONCRETE BASIN SECTION
4	4	THIN WALL KNOCKOUT ON ALL 4 SIDES, SEE KO DIMENSION FOR MAXIMUM PIPE O.D.
5	1	NAMEPLATE INDICATING: MFG: NWPX PARK 888-611-PARK WWW.PARKUSA.COM MODEL: JB DATE MANUFACTURED
6	-	ALL JOINTS SEALED WATER-TIGHT WITH RAM-NEK

NOTE:
RISER SECTION AVAILABLE IN 6" to 18" DEPTHS.

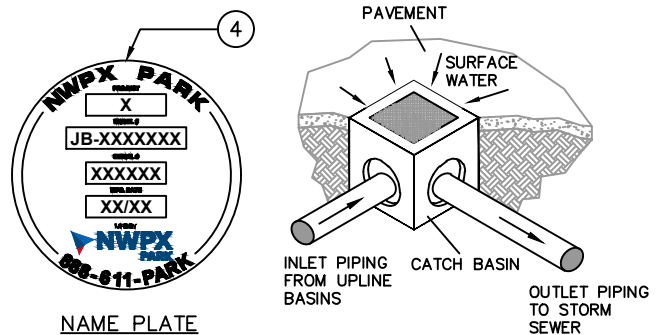

JUNCTION BOX SCHEDULE									
MODEL NO.*	W1	W2	H1	H2	T1	T2	KO	COVER SIZE	WEIGHT LBS
JB-48	60"	48"	54"	48"	6"	6"	48"	38"x38"x2"	7,250
JB-60	72"	60"	66"	60"	6"	6"	60"	38"x38"x2"	10,500
JB-72	84"	72"	78"	72"	6"	6"	72"	38"x38"x2"	15,350
JB-84	96"	84"	78"	72"	6"	6"	72"	38"x38"x2"	19,500

*ALL JUNCTION BOXES ARE STANDARD PEDESTRIAN DUTY OR OPTIONAL TRAFFIC DUTY.



SECTION VIEW

SPECIFICATIONS

- CONCRETE :** PRECAST CONCRETE WITH DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH. RATED FOR H-20 LOADING.
- REINFORCEMENT:** GRADE 60 REINFORCED. STEEL REBAR CONFORMING TO ASTM A615 ON REQUIRED CENTERS OR EQUAL.
- C.I. CASTINGS:** CAST IRON FRAMES AND GRATES ARE MANUFACTURED OF GREY CAST IRON CONFORMING TO ASTM A48-76 CLASS 35.

					JUNCTION BOX		REV.
					MODEL JB - 48" THRU 84"		
PM	PC	DRN	ENG	DWG. NO.	JB-2-WA		
DATE	10/25	KV	CE				
					A		