



SHOWN w/ FLAT TOP

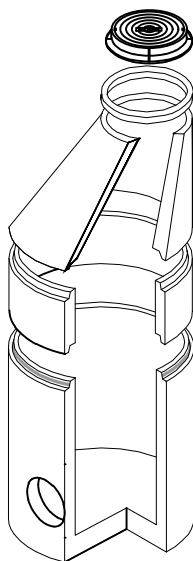

SHOWN w/ ECCENTRIC CONE

OPTIONS

- * STEPS
- * EXTENDED LIP BASE
- * COATINGS
- * BOTTOM

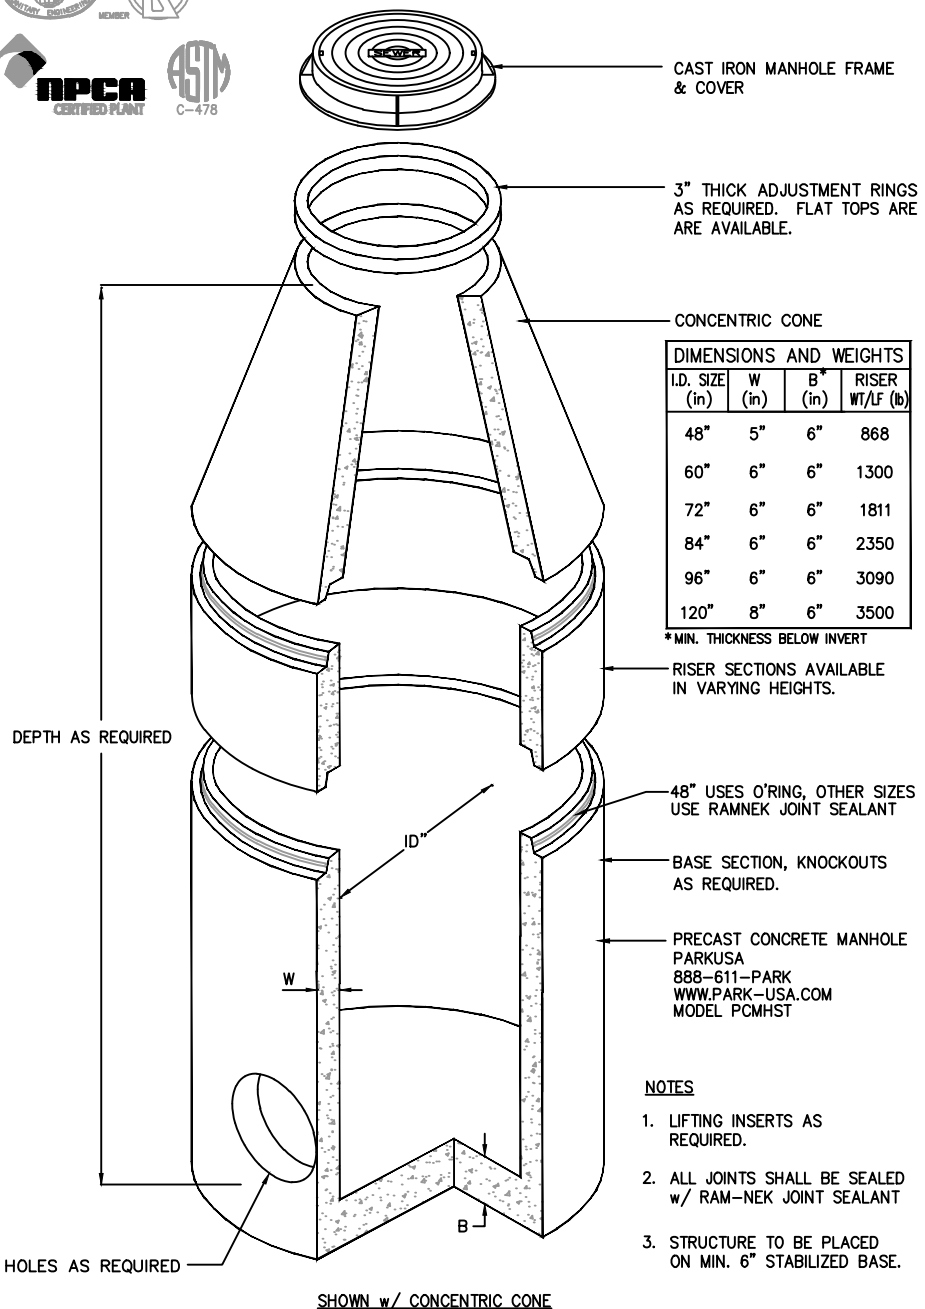

Specifications

CONCRETE: CLASS I/II CONCRETE WITH OF DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. RATED FOR H-20 LOADING.

REINFORCEMENT: STRUCTURAL REINFORCEMENT CONFORMING TO ASTM-C-478.

C.I. CASTINGS: CAST IRON FRAMES AND GRATES ARE MANUFACTURED OF GREY CAST IRON CONFORMING TO ASTM A48-76 CLASS 35.



PRECAST CONCRETE MANHOLE
FOR STORM SEWER - MODEL PCMHST 48" THRU 120"

PM	PC	DRN	ENG	DWG. NO.	REV.
.	.	.	.	PCMHST-1	A
DATE	2022				

© ParkUSA. ALL RIGHTS RESERVED.

PLOTTED ON 4/22/2024 10:52 AM BY Vu, Kate, D:\File replacement website\PCMHST-1